

## Wall Indicator Post For Valve 4" – 12" FIG · F0600–WP

### Specifications

- Indicates if the valve is in the open or shut position.
- Used to operate a valve installed behind a wall.
- With a 12" O.D. post flange to mount on a wall.
- Operated by handwheel.
- Can be supplied in open left or open right.
- For use with gate valve size 4"-12".
- UL/ULC Listed and FM Approved.
- GOST Certification.

### Corrosion Protection

- Internally and externally red epoxy spray painting, RAL3000.

### Notes:

*Design and material are subject to change without notice.*



### Field Adjustment

- Remove the Top Section from the top of the Indicator Post assembly.
- Set the "OPEN" and "SHUT" targets for the appropriate valve size.
- Reattach the Top Section to the top of the Indicator Post assembly.

### Note:

*Design and material are subject to change without notice.*

### Schematic

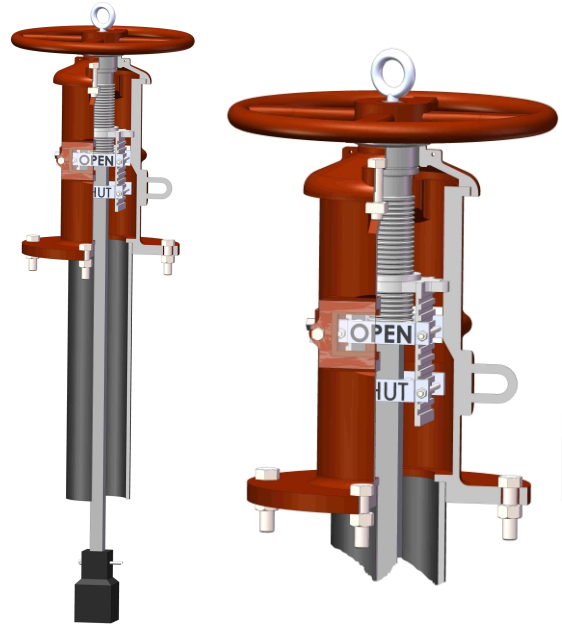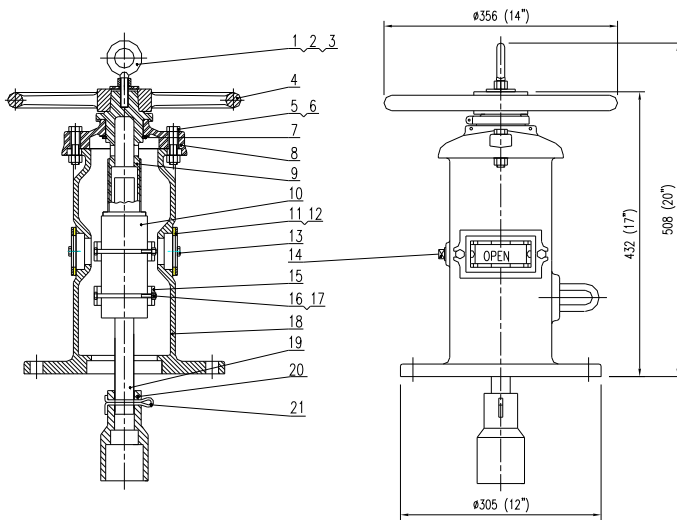

### Material Specifications

No.	Component	Material
1	Eyebolt	Carbon Steel ASTM A307B
2	Hex Nut	Carbon Steel ASTM A307B
3	Washer	Carbon Steel ASTM A570 Gr.33
4	Handwheel	Ductile Iron ASTM A536 Gr. 65-45-12
5	Hex Cap Screw	Carbon Steel ASTM A307B
6	Square Nut	Carbon Steel ASTM A307B
7	Snap Ring	Carbon Steel AISI 1066
8	Cover	Cast Iron ASTM A126 Class B
9	Operating Nut	Bronze ASTM B62 C83600
		Stainless Steel AISI 304
10	Target Carrier Nut	Bronze ASTM B62 C83600
		Stainless Steel AISI 304

No.	Component	Material
11	Window Glass	Plexiglass
12	Gasket	PTFE
13	Hex Nut	Carbon Steel ASTM A307B
14	Plug	Malleable Iron
15	Target	Cast Aluminium
16	Hex Cap Screw	Carbon Steel ASTM A307B
17	Hex Nut	Carbon Steel ASTM A307B
18	Body	Cast Iron ASTM A126 Class B
19	Stem	Carbon Steel AISI 1045
20	Crane Coupling	Ductile Iron ASTM A536 Gr. 65-45-12
21	Cotter Pin	Stainless Steel AISI 304