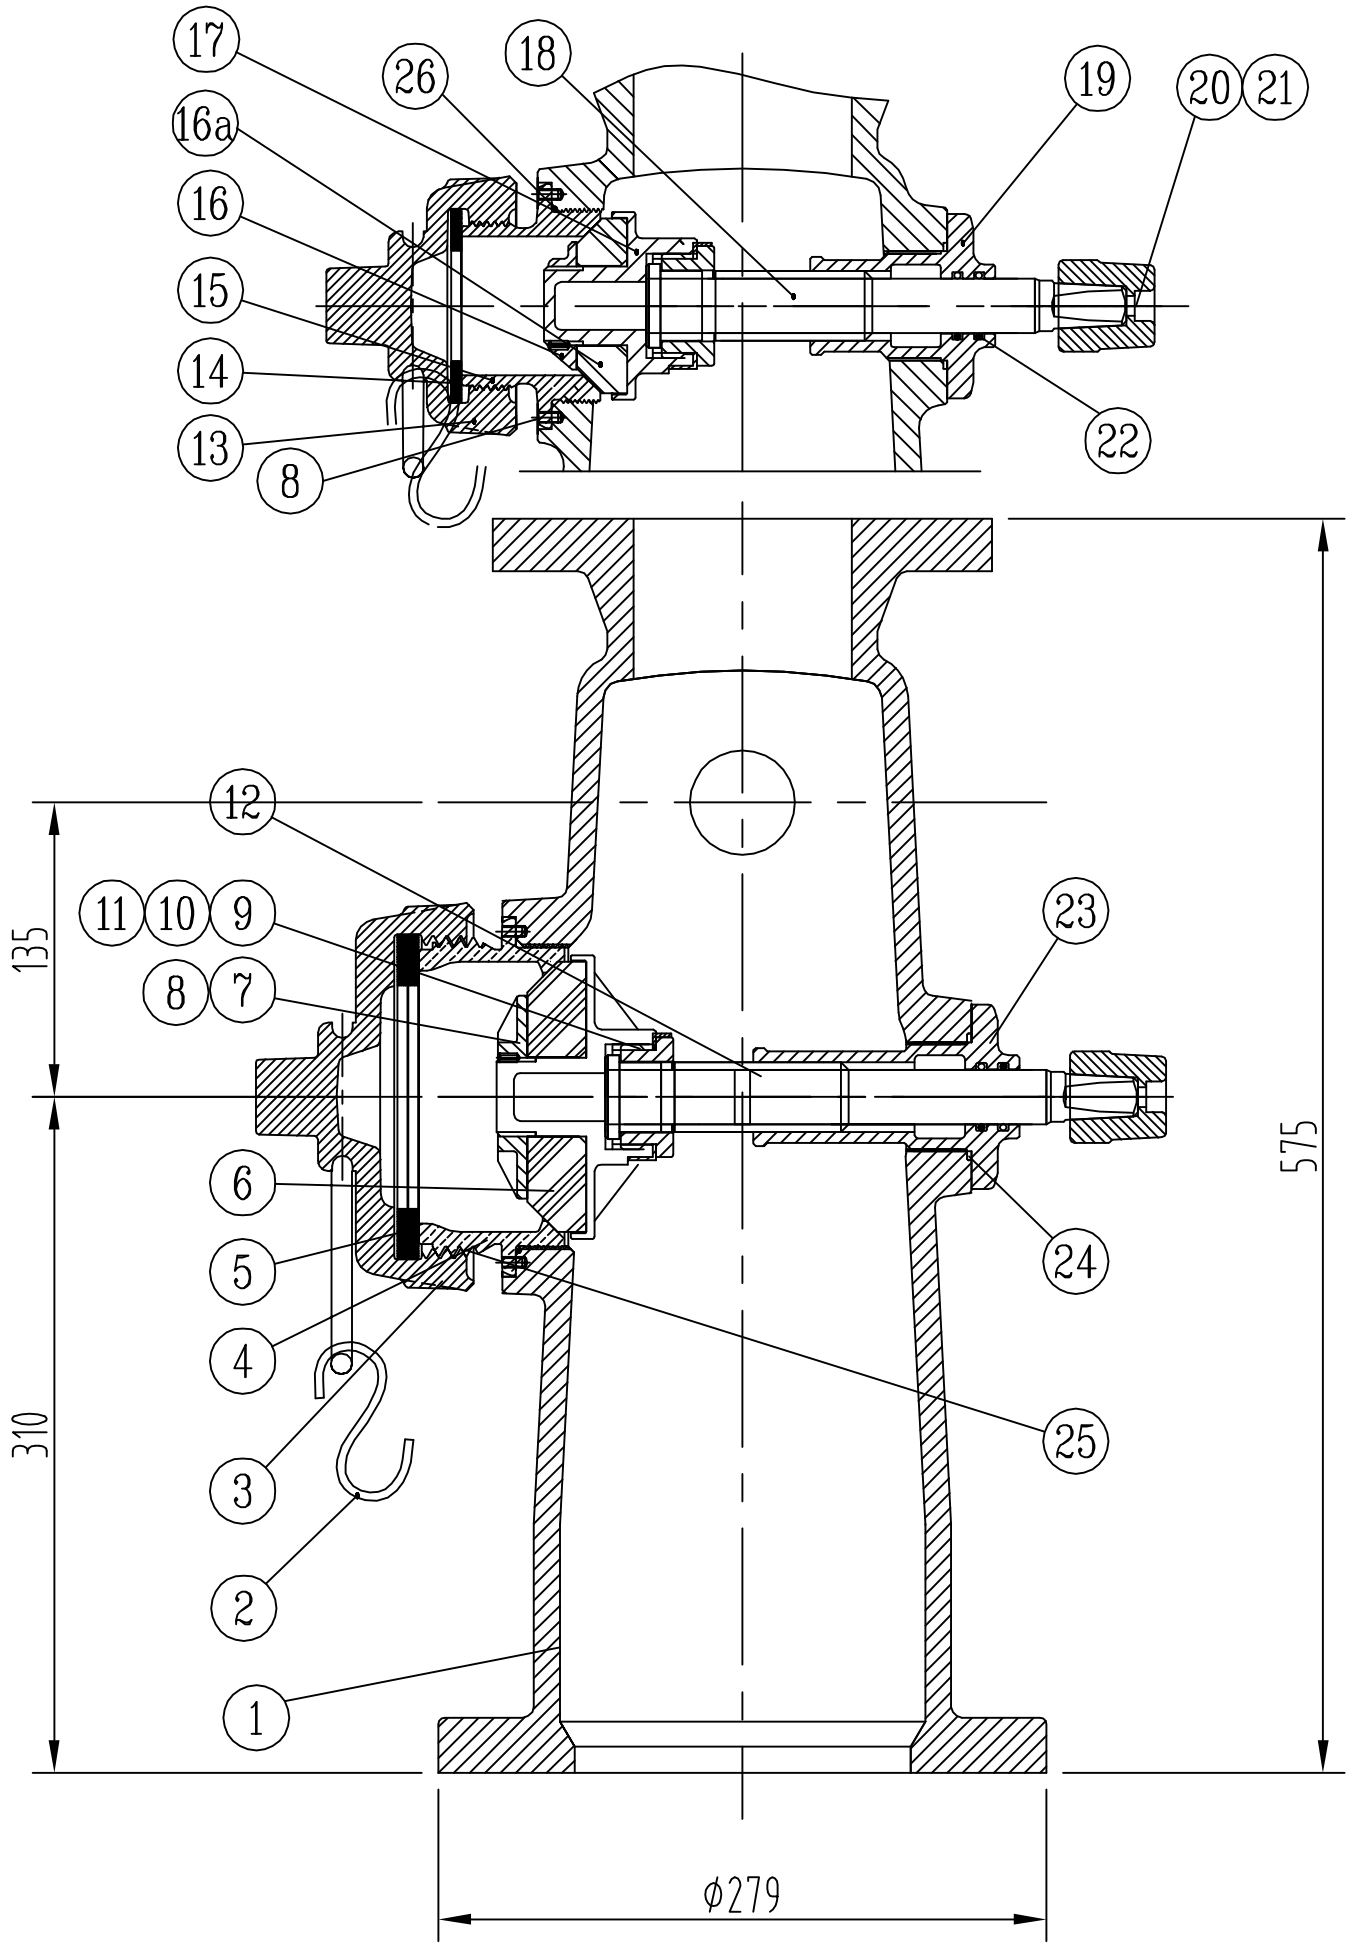

The outlet types are:
1 x 2–1/2" NST Hose Outlets + 1 x 4" (or 4.5") NST pumper connection
(or 5" nonthreaded storz) With 1 x 4" Monitor Flange .

No.	Drawing Number	Part Name	QTY.	Material		
26	GB/T 3452.1-2005	O-ring	1	NBR		
25	GB/T 3452.1-2005	O-ring	1	NBR		
24	GB/T 3452.1-2005	O-ring	2	NBR		
23	571001	Stem nut	1	Bronze, ASTM B62		
22	GB/T 3452.1-2005	O-ring	4	NBR		
21		Bolt	2	SS304		
20	567572	Operating nut	2	Bronze, ASTM B62		
19	571002	Stem nut	1	Bronze, ASTM B62		
18	591952-3	Stem-C	1	SS304		
17	588992	Main valve holder	1	SS304		
16a	592545	Main valve	1	NBR		
16	566782	Main valve retainer	1	Bronze, ASTM B62		
15	580001	Hose nozzle	1	Bronze, ASTM B62		
14	492376	Hose nozzle gasket	1	NBR		
13	470271	Hose nozzle cap	1	CI, ASTM A126		
12	591952-1	Stem-B	1	SS304		
11	ϕ72*ϕ48*1	Lock washer	2	SS304		
10	566881	Holder nut	2	Bronze, ASTM B62		
9	588991	Main valve holder	1	SS304		
8	GB71-85	Screw M5x10	9	SS304		
7	566781	Main valve retainer	1	Bronze, ASTM B62		
6	592544	Main valve	1	NBR		
5	492410	Pumper nozzle gasket	1	NBR		
4	481008	Pumper Nozzle	1	Bronze, ASTM B62		
3	473694	Nozzle cap	1	Cast Iron		
2		Chain	3	Carbon Steel		
1	556005M	Body	1	DI,ASTM A536 65-45-12		

WEFLO Valve Co., Ltd.

WET BARREL FIRE HYDANT
1–HOSE&1–PUMPER
WITH MONITOR FLANGE

C503-1H1PM